

MODECOM FREEWAY SX 7.0


Firmware updates >> Windows CE 6.0

- **Charge navigation before updating**
 - **Updating erases all data from the device**
 - **Carry out update proces according to the instruction To run update proces a microSD card is required**
-

1. Prepare a miicroSD memory card. The files will be loaded on it
2. Download from the link below compressed file and the extract all files to the microSD card
http://freetab.eu/softy/ENG/Navigation/FreeWAY_SX_70/Firmware/Firmware_freeway_sx_70_2017a.zip
3. Place the microSD card in the navigation
4. Start the device and wait for the start of the screen calibration, calibrate the screen


```
INFO : NAND ID 2C 44 44 4B AB 00
INFO : SD001 COMPLETED
CHECK SD CARD CONTENT
INFO : LOAD XIP.BIN
INFO : NO ERASE
STAN NAND BLOCKS AND ERASE
PROGRESS <=====|=====
INFO : BAD BLOCK NUMBER 15
PROGRAM METAZONE.BIN
FOUND LOGO.BMP
PROGRAM LOGO.BMP
PROGRAM LOGO.BMP
PROGRAM LOGO.BMP OK
FOUND BAT.GIF
PROGRAM BAT.GIF
PROGRAM RTK.BIN
PROGRAM RTK.BIN OK
PROGRAM XIP.BIN
```

```
INFO : NAND ID 2C 44 44 4B AB 00
INFO : SD001 COMPLETED
CHECK SD CARD CONTENT
INFO : LOAD XIP.BIN
INFO : NO ERASE
STAN NAND BLOCKS AND ERASE
PROGRESS <=====|=====
INFO : BAD BLOCK NUMBER 16
PROGRAM METAZONE.BIN
FOUND LOGO.BMP
PROGRAM LOGO.BMP
PROGRAM LOGO.BMP
PROGRAM LOGO.BMP OK
FOUND BAT.GIF
PROGRAM BAT.GIF
PROGRAM RTK.BIN
PROGRAM RTK.BIN OK
PROGRAM XIP.BIN
BACKUPXIP OK
STAN NAND BLOCKS AND ERASE
PROGRAM XIP.BIN
```

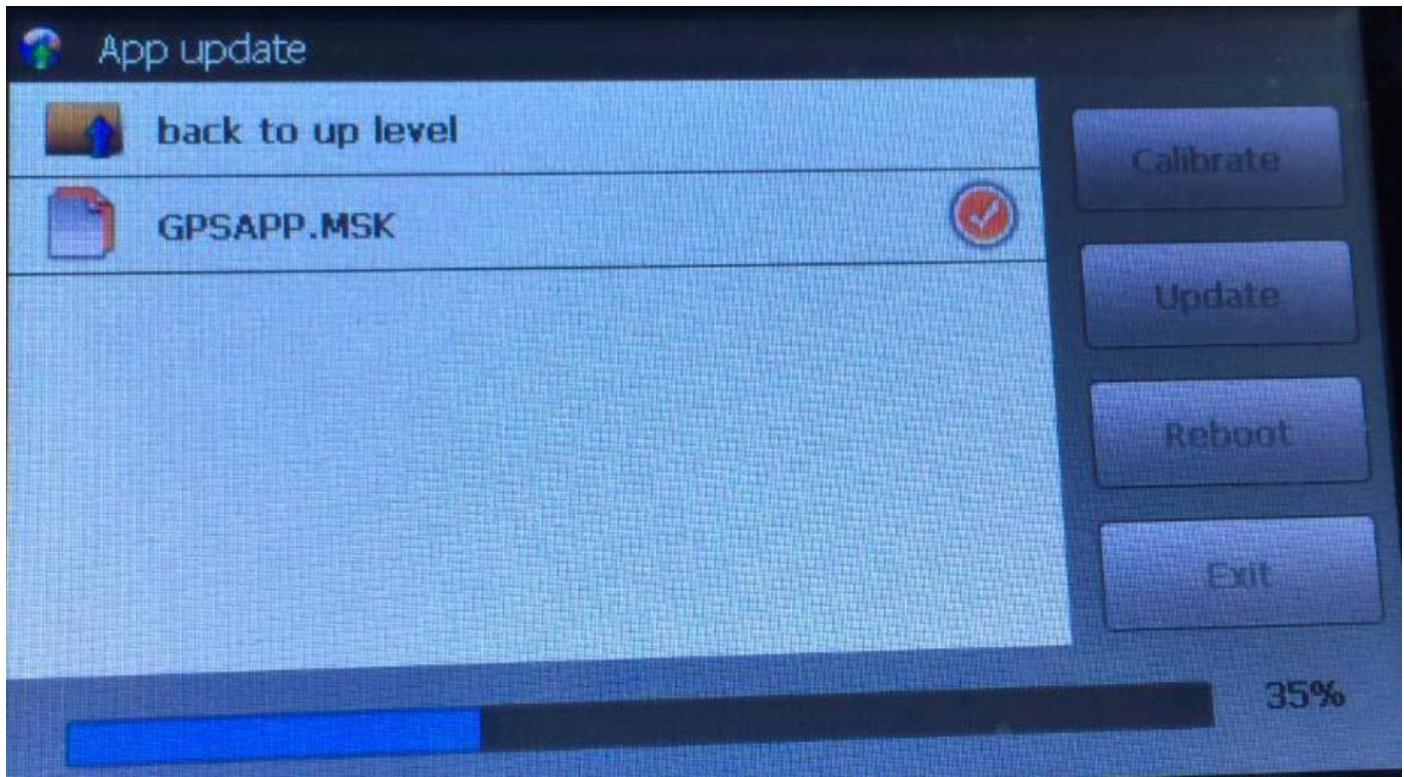

PERFORM CALIBRATION

Özel kalemciği dikkatlice hedefin ortasına hafifçe basılı tutunuz
Ekrandaki diğer hedef noktalar içinde aynı işlemi yapın.



CLICK SCREEN TO UPDATE HAS BEEN RECORDED

Yeni kalibrasyon ayarlaması yapıldı
Ekrana dokunun ve yeni ayarı kayıt edin.

Time limit : 29 sec

**AFTER STARTING PANEL NAVIGATION TURN OFF AND TURN ON
VIA POWER BUTTON**

